



# Dex 40, 60, 96

Dust extractor unit




# Dex 40, 60, 96

An industrial dust extractor unit fitting to the briquetting machines Falach is suitable for small and medium joinery workshops. These units can be used for soft or hard wood, MDF, chipboard. Cylindrical filter sleeves are fitted to the large expanding area above the briquetting machine hopper. The filter sleeves are supported by a frame with a vibrating regenerating system. The suction fan is situated separately and can be selected according the required use.

Technical data	Dex 40	Dex 60	Dex 96
■ Filter area	40 m <sup>2</sup>	60 m <sup>2</sup>	96 m <sup>2</sup>
■ Number of sleeves	40	60	96
■ Suction fan	VSM-056-0250-K	VSM-071-0300-K	N°2 VSM-071-0300-K
■ Motor	5,5 kW	7,5 Kw	N°2 7,5 Kw
■ Volume of the air	4 230 m <sup>3</sup> /h	6 100 m <sup>3</sup> /h	12 200 m <sup>3</sup> /h
■ Suction outlet diameter	250 mm	300 mm	N°2 300 mm
■ Suction pressure	2500 Pa	2300 Pa	2300 Pa
■ Filter dimension (mm)	1900x1120x4100H	2700x1120x4100H	2700x1650x4100H
■ Fan dimension (mm)	820x620x670H	870x700x850H	2 pcs 870x700x850H

filter sleeves

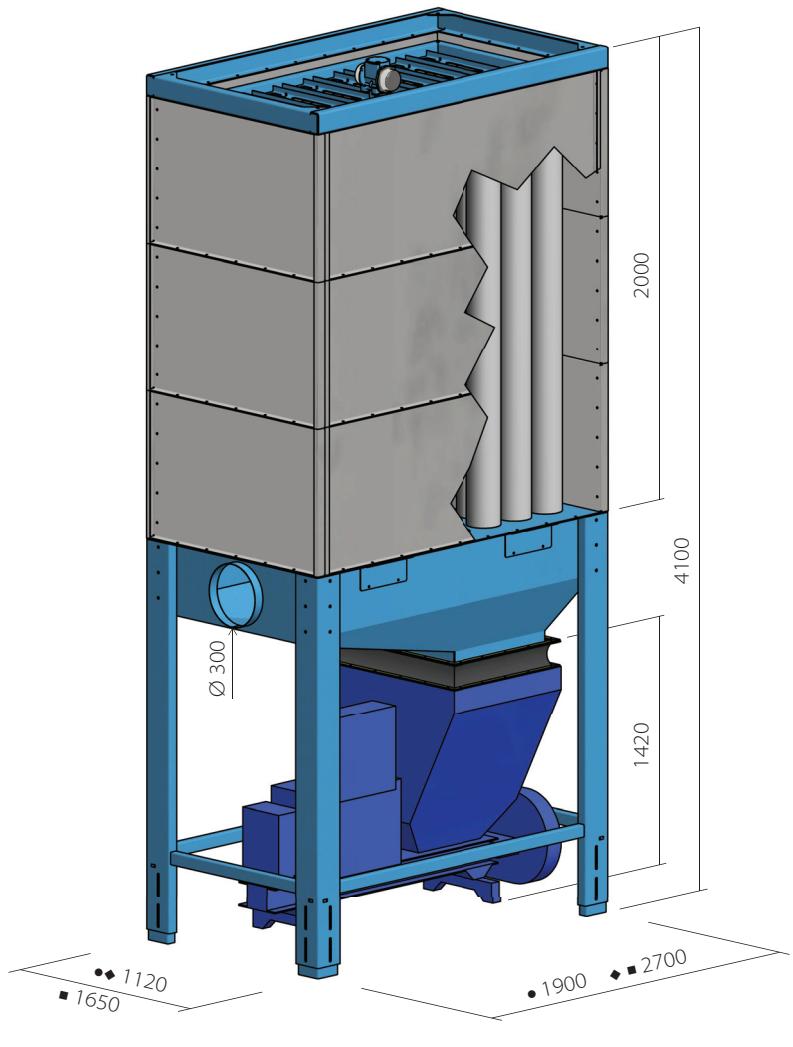

• Dex 40, ◆ Dex60, ■ Dex 96